



INSTALLATION GUIDE

2015+ VW GTI 2.0T Performance Downpipe

FOR RACING USE ONLY

Congratulations on your purchase of the AWE Tuning Performance Downpipe for the 2015+ VW GTI 2.0T.

Exquisite build quality with industry leading performance distinguishes this downpipe from all others.

Contact us with any installation questions.

215-658-1670

AWE-Tuning.com

performance@AWE-Tuning.com

PARTS LIST



INSPECT ALL PARTS PRIOR TO DISASSEMBLY OF VEHICLE; IF DAMAGED OR MISSING, PLEASE CONTACT THE PLACE OF PURCHASE IMMEDIATELY.

QTY	Description	Part Number
1	200cpi HJS HD Cat	LC
1	Outlet Adapter to OE Exhaust	LE
1	3" Outlet adapter to AWE Exhaust	LF
1	7.5 INCH ZIP TIE	7130K59
1	Gasket, Mk7 GLI Turbine Outlet	5Q0253115B
1	3.00in ACCU-SEAL	TAS300



Step 1

If you intend to install an AWE Tuning cat back exhaust system, it is recommended that you install the downpipe first to make cat back alignment easier.

Before removing the factory downpipe, first soak the downpipe V-Band and sleeve clamp bolts in a penetrating oil for several hours to ensure easy removal. Also use a quality anti-seize compound on all fastener threads during re-assembly

Once the factory downpipe is removed, use a small flat head screw driver or pick tool in the notch at arrow in **Figure 1** to remove the original gasket.

Remove all gasket residue before installing the supplied new gasket.

Reuse factory V-Band clamp.

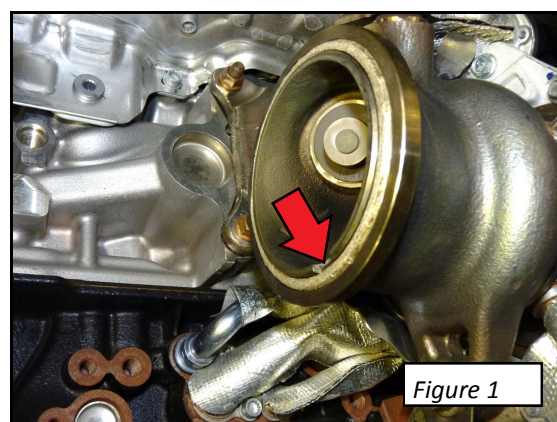


Figure 1

Step 3

Once O2 Sensor wiring harness is properly routed, use the supplied ziptie to secure it away from the downpipe as shown at arrow in **Figure 3**.

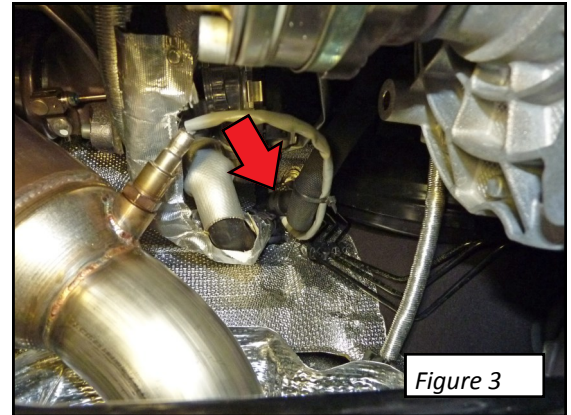


Figure 3

Step 4

Please note that the AWE Tuning downpipe is designed to use the supplied adapter LE to mate to the factory sleeve clamp if the factory exhaust is being used.

Use adapter LF (supplied with exhaust) to mate the AWE Tuning downpipe to the AWE Tuning cat back exhaust, as shown in **Figure 4**. Use supplied 3.00" Accu-Seal clamp at **Arrow A** and 2.50" clamp (supplied with exhaust) at **Arrow B** in **Figure 4**.

After downpipe install, ensure that no parts of the system are contacting the factory heat shield tunnel mat. The mat is flexible and can be pushed away from downpipe if there is contact.

Tighten all Accu-Seal band clamps to 40 ft/lbs.

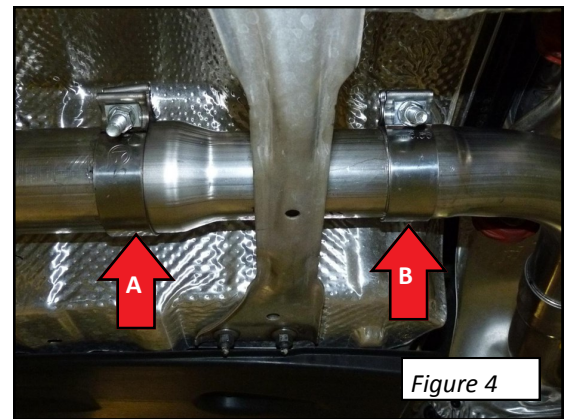


Figure 4

ENJOY

Once installed properly, your AWE Tuning High Flow Downpipe will provide years of fault-code free improved performance.



Any questions or comments,
please do not hesitate to contact us:

215-658-1670
AWE-Tuning.com
performance@AWE-Tuning.com



AWE Tuning
2385C Maryland Road
Willow Grove, PA 19090
215-658-1670
performance@AWE-Tuning.com

Thank you for choosing AWE Tuning as your performance automotive parts supplier. Please remember that a performance car is only as strong as its weakest link. Therefore, it is vital that you maintain your vehicle to factory specifications.

By installing or using the purchased product, the Consumer accepts this warranty and any specific Manufacturer warranties enclosed.

Limited Warranty

The following warranty is valid only in the United States.

The Manufacturer's full warranty applies to all products sold.

Secor Ltd. (AWE Tuning) warrants to the original retail purchaser (Consumer) this product (2015+ GTI 2.0T Performance Downpipe) against manufacturing defects for ONE YEAR on catalytic converter and LIFETIME on balance of parts from date of original purchase.

Upon verification of warranty coverage, AWE Tuning will repair or replace the defective product at their discretion, without charge. This is the only remedy the Consumer has for any loss or damage, however arising, due to nonconformity in or defect of the product. This warranty does not cover consequential damage, loss of time or revenues, shipping costs, labor costs, inconvenience, loss of use of vehicle, damage to the vehicle or components, or other incidental or indirect damage.

All warranties are void if the product was not installed by a certified auto mechanic, improperly serviced, modified, or used in a way not intended by the Manufacturer. Use of product in Motorsports or Racing conditions is grounds for warranty denial. Motorsports and Racing is an inherently abusive operational condition, and it is impossible to warranty for this type of usage.

The Consumer is responsible for ensuring that the product is installed in a safe and proper manner, and should cease usage of the product immediately if an unsafe or improper condition is noted. If an unsafe or improper condition is noted, the Consumer should then immediately contact the facility where the product was installed or AWE Tuning directly.

Please contact the original place of purchase for any warranty claims or explanations of this document.